


**External Elevation
(Showing removed stone)**

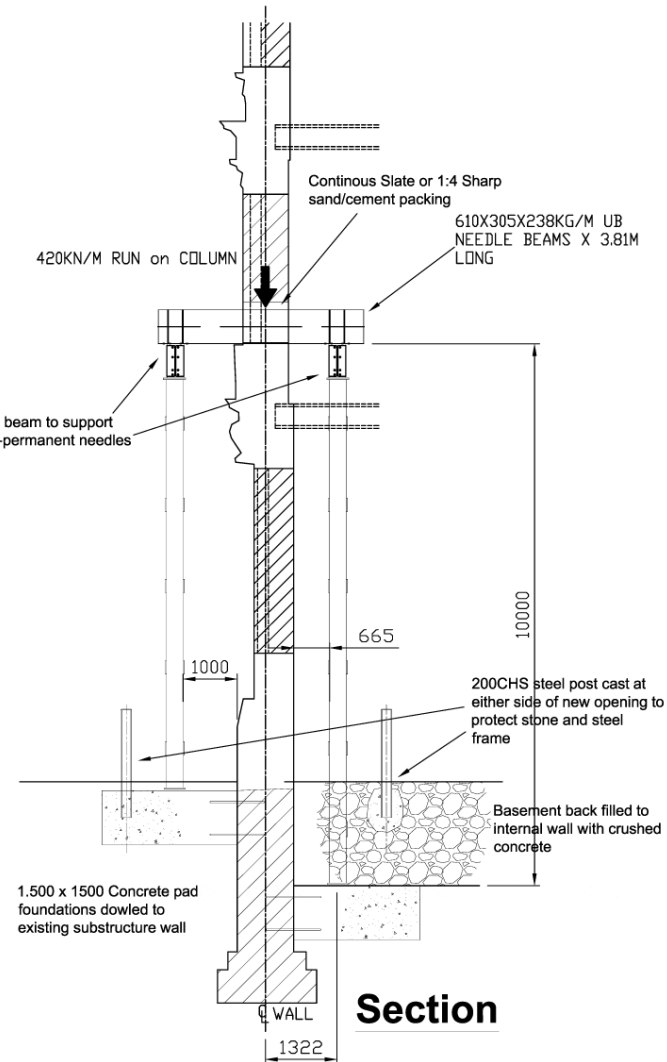

ASSOCIATED DRAWINGS	
No.	TITLE

NOTES	
1.	NO DIMENSIONS ARE TO BE SCALED FROM THIS DRAWING.
2.	THIS DRAWING IS PROVISIONAL ONLY AND SUBJECT TO COMMENTS AND APPROVALS WHICH MAY RESULT IN AMENDMENTS.
3.	CONFIRMATION OF STONE REMOVAL IS DEPENDANT ON THE SORTING AND EXISTING CONSTRUCTION. STONE MASON TO CAREFULLY REMOVE MINIMUM STONE AS NECESSARY TO CONSTRUCT THE 9000x 9500H OPENING.
4.	STONE WORK ABOVE TO BE RESUPPORTED ON SLATE PACKING WITH MORTAR DRESSING TO FACE TO PREVENT VIBRATIONAL DISTURBANCE ETC.
5.	20mm (1900 DIA LONG) HIGH TENSILE STEEL DOWELS ARE TO BE REINED INTO THE EXISTING SUBSTRUCTURE WALLING PRIOR TO CASTING PAD FOUNDATIONS TO MITIGATE RISK TO DISSIMILAR MOVEMENT.
6.	SUPPORTING COLUMNS AND STEEL BEAMS TO BE CONNECTED TO NEEDLES WITH M20 (8.8) BOLTS - 4 PER CONNECTION.

LEGEND			

REV	DESCRIPTION	AUTH	DATE

**G1 Building
George Square
Glasgow**

External opening details to
Hanover Street Elevation

CLIENT
Dragon Developments Ltd

COLEMAN & COMPANY
DEMOLITION LAND RECLAMATION BUILD RECONSTRUCTION

Shady Lane, Great Barr, Birmingham, B44 9ER.
Tel: +44 (0)121 325 2424, Fax: +44 (0) 121 325 2425
www.coleman-co.com ccmr@aol.com

DRAWING No		C176 / 006	
SCALE	1:50 @ A1	Date	3rd July 2006
DRAWN BY	E. Aslin	CHECKED	
SURVEYED	E. Aslin	ISA	CHECKED BY